













Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

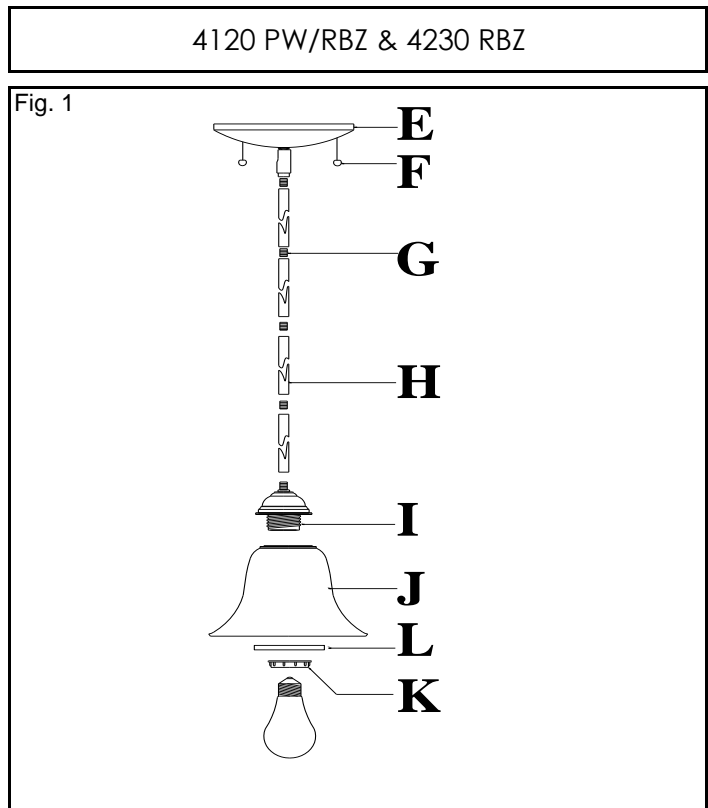
PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Mounting Strap  1 ea 4"*H1.5mm	Wire Connector  2ea P3 Orange	Green Grounding Screw  1 ea #8-32N*10mm	
Mounting screw  2 ea 5/32"*H38mm	Hex Nut  2 ea 5/32"*H3.5mm	Canopy  1ea 5" Dia *H1"	
Junction Box Screw  2 ea #8-32N*H32mm	Deco Nut  2 ea 5/32"*H9mm	Nipple  4 ea 3/8"*H15mm	
Rod (ROD-12 RBZ)  3 ea Ø1/2"*H12"	Rod  1 ea Ø1/2"*H6"	Socket Washer  1 ea Ø58*H1mm	
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

- For adjusting the height of fixture, this fixture contains 12" Rod x 3pcs and 6" Rod x 1pc. First decide the height required and thread the Nipple(G) inside of Rods(H).
- Put the fixture wire through Rods and connect the Rods(H) and Nipples (G) together. Pull fixture wire until taut.
- Thread the rods to fixture frame (I) and Canopy(E).
- Raise Canopy (E) against ceiling and tighten securely with Deco Nuts(F).
- Slide Glass Shade (J) and Socket Washer (L) to Socket (I) and tighten with Socket Ring (K)
- Install light bulb in accordance with fixture's specifications.
(DO NOT EXCEED MAXIMUM WATTAGE RATING)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.



For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread two Mounting Screws (A) half way into the Mounting Strap (B).
4. Attach Mounting Strap (B) to the Junction Box by using the two Junction Box Screws (C). Tighten the screws securing with screw driver!!

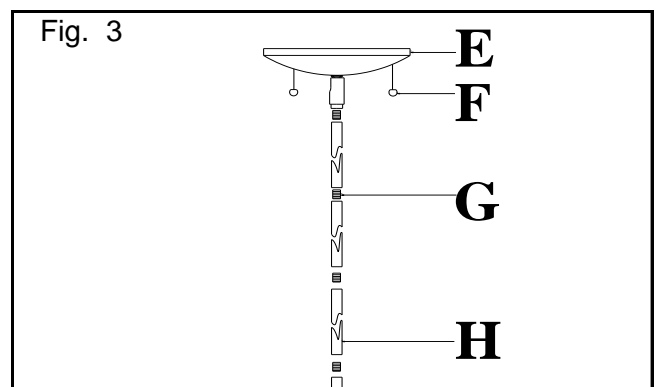
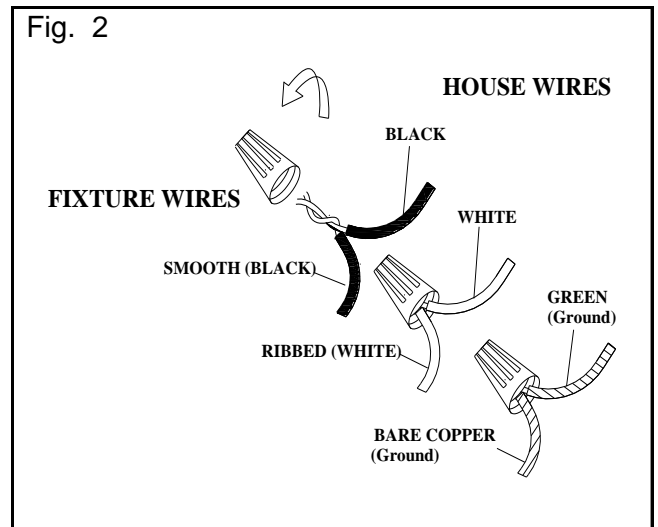
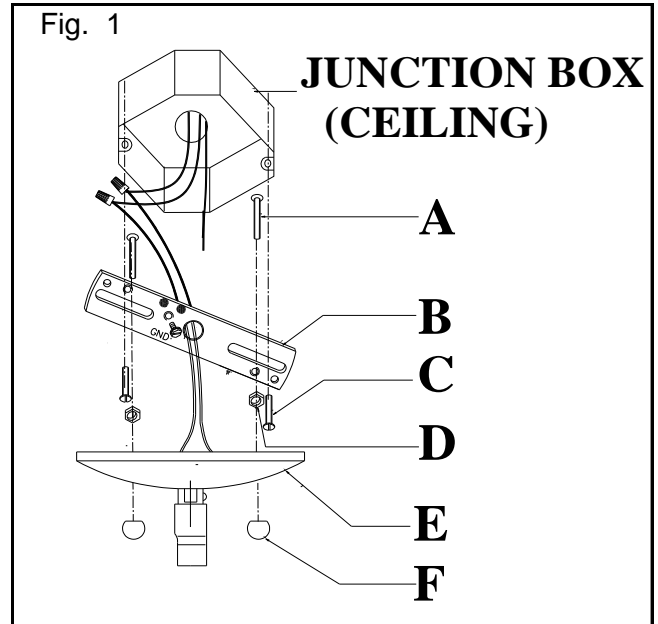
CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
 6. Attach GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the Green Ground Screw on the Mounting Strap (D) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
7. Tuck these wire connections neatly into the ceiling Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture's Canopy (F) over the Mounting Strap (B) and over the Mounting Screws (A), adjust the fixture Canopy (E) and secure the fixture against ceiling by threading the Decorative Nuts (F) until tight.
9. Install the light bulbs and glass shade as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE



For Customer Service, contact the place of purchase to arrange for replacement parts.