

# PARTS & ASSEMBLY SHEET

Fixture Name: Woodbriar 8995-BA2 SBZ

iriis iikture asserribiea i O. Bate.	This f	ixture	assembled P	O:	Date:	
--------------------------------------	--------	--------	-------------	----	-------	--

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

DADTET	TCT	Company Name:		Co. Account #:		
PARTS L	121	to be filled out by retailer				
Mounting Strap	6990	Mounting Screws	(	Deco Nut		
1ea <b>ø</b> 4"*H2mm		2ea 8#32-IP*1"		2ea 5/32-IP*H9mm		
Wire connectors		Mounting Screws	(h1111111)	Hex Nut		
3ea P3 Orange		2ea 5/32-IP*1-1/4"		2ea 5/32-IP*H3mm		
Part Needed				Quantity		
Part Needed	(missing, scratched, broken glass, bent, bad finish)			Quantity		
Reason why Comments						
		·	<u> </u>	·	-	


### FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet, but do not install before assembling the fixture.

- Slide the Glass Shade (J) over Socket (I).
  Secure Glass Shade (J) by threading the Socket Ring
  onto Socket (I) until tight.
- 2. Install the light bulb in accordance with the fixture's specifications.

DO NOT EXCEED MAXIMUM WATTAGE RATING!

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

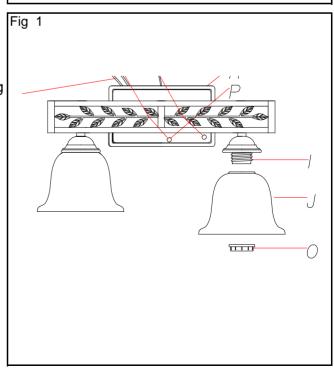

8995-BA2 SBZ

For Customer Service, contact the place of purchase to arrange for replacement parts.



# INSTALLATION INSTRUCTIONS

Fixture Name:

Woodbriar 8995-BA2 SBZ

For Wall Mount Light Fixture

## WARNING! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig. 1)

- 1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
- 2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
- 3. The Mounting Strap (F) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back Plate (H) and thread the two Mounting Screws (D) half way into the Mounting Strap(F) and secure with Hex Nut (G).
- 4. Place the Mounting Strap (F) over the Junction Box (A) so the Mounting Screws (D) are vertical or horizontal, as required by fixture type.
- 5. Attach the Mounting Strap (F) to the Junction Box using the two mounting screws (H)and tighten securely with screw driver.

#### **CONNECTING THE WIRES** (Fig. 2)

- 6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
- 7. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw (I) on the Mounting Bracket (F) or connect both wires together using the correct size of wire connectors.

NOTE:Twist the wires together in the same direction you twist the wire connector (L) onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

#### FINISHING THE INSTALLATION (Fig. 3)

- 9. After tucking these wire connections neatly into the Junction Box, place the fixture Back Plate (H) over the two Mounting Screws (B).
- 10. Secure the Back Plate (H) against the wall by threading the two Deco Nuts (P) over the two Mounting Screws (B) until tight.
- 11. Install the light bulbs and glass shade as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

