PARTS & ASSEMBLY SHEET

GOLDEN
Elegant lighting for everyday living

Fixture Name: Multi-Family 3124 PW/RBZ

This fixture assembled PO:_____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note onthis sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name:_____Co. Account #:_____
below to be filled out by retailer

Mounting strap 1ea 3/4"X4"	Junction box screws 2ea #8-32N*18mm	Threaded rod 1ea 3/8"*H45mm
Wire connnector 3ea P3 Orange	Hex nut 2ea @3/8X3mm	Deco nut (round nut) 1ea 3/8"*H9mm
Green ground screw 1ea 8/32"X10mm	Sping washer 1ea Ø15*H3mm	Bottom cap 1ea 38*H28mm
Plastic washer 2ea Ø*H2mm	Set screw (headless) 2ea 5/32"*H10mm	Deco nut (round nut) 2ea Ø8.5*H8.2mm

Part Needed _____ Quantity _____

Part Needed _____ Quantity _____

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

3124

Fig. 1

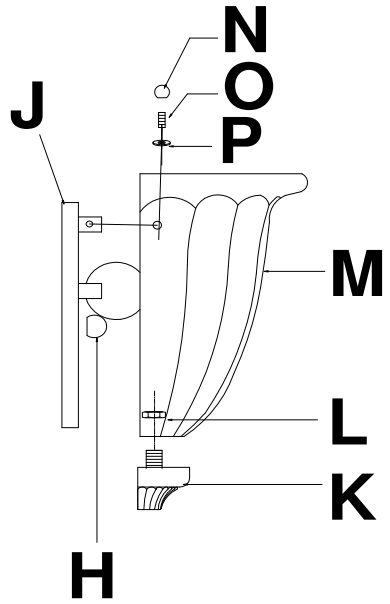

1. Slide Bottom cap (K) into hole at the bottom of Glass shade (M), and tighten with Hex nut (L).

2. Install the light bulb in accordance with the fixture's specifications.

3. Place the Glass Shade (M) flush with the Back plate (J) thread Set screw (O) to Back plate (J) and slide Plastic washer (P) over Set screw (O) on outside of Glass shade (M) and tighten securely with small Deco nut (N).

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

For Customer Service, contact the place of purchase to arrange for replacement parts.

INSTALLATION INSTRUCTIONS

GOLDEN
Elegant lighting for everyday living

Fixture Name: Multi-Family 3124 PW/RBZ

For Wall Mount Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holes all your parts. Check that all parts are included as shown in the illustration and parts list.

2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.

3. Take Threaded Rod (D) from parts bag and thread into center screw hole on Mounting Strap (A), tighten with Hex Nut (B) and Spring Washer (C).

4. Attach the Mounting Strap (A) to the Junction Box (I) using the two Mounting Screws (E). Tighten the screws securely.

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).

6. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (A) or connect both wires together using the correct size of wire connectors.

NOTE:Twist the wires together in the same direction you twist the wire connector onto the wires.

7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture Back Plate (J) over the Threaded Rod (D), so it protrudes through the hole in the Back Plate (J).

9. Thread the Deco Nut (H) onto the Threaded Rod (D) and continue turning until the Back Plate (J) is snug against the wall.

10. Install glass as per the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

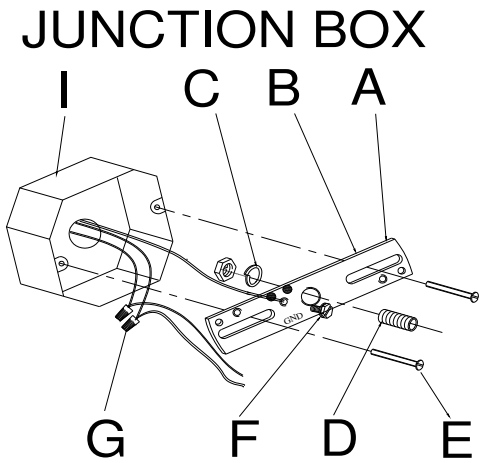

Fig. 2

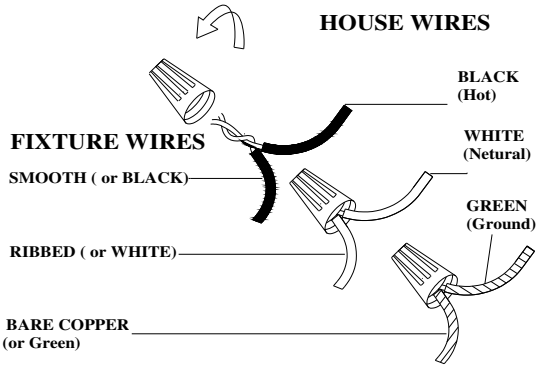

Fig. 3

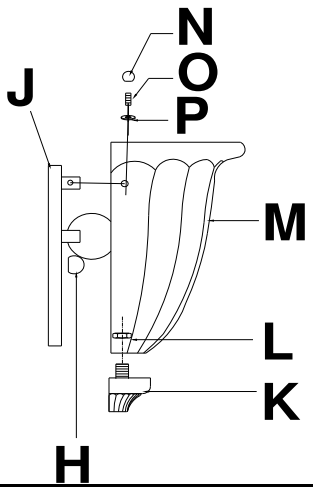

For Customer Service, contact the place of purchase to arrange for replacement parts.