








Fixture Name: **Mayfair 7116-M1L LC**

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

<b>PARTS LIST</b>		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Canopy 1ea Ø5-3/4"*H1-1/2" 	Mounting Screws 2ea 8#32-IP*1" 	Top loop 1ea 1/8-IP*H60mm 	
Chain 1ea 6ft Ø3.8 	Wire connectors 3ea P3 Orange 	Nipple 1ea 1/4-IP*H60mm 	
Chain connector 2ea Ø5.8*H61mm 	Canopy loop with Collar 1ea Ø1-1/8"*H42mm 	Mounting strap 1ea W4-1/8"*E1"*H5mm 	
Rod 3ea Ø11.7*H12" 	Arm 3ea 2-1/4"*H5-1/2" 	Deco Nut 3ea 5/32-IP*H9mm 	
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why ( missing, scratched, broken glass, bent, bad finish)			
Comments _____			


### FIXTURE ASSEMBLY INSTRUCTIONS

**Read and review installation instruction sheet before assembling the fixture.**

#### ASSEMBLING THE FIXTURE (Fig 1)

1. By measuring determine correct number of rods and chain needed for proper hanging height. There are 2 ft of chain and 2 optional 12" rods included.
2. To shorten the fixture slide the excess 12" rods off the wire.
3. To lengthen the fixture thread the additional rods onto the wire or substitute longer chain for the 2 foot length included.

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**

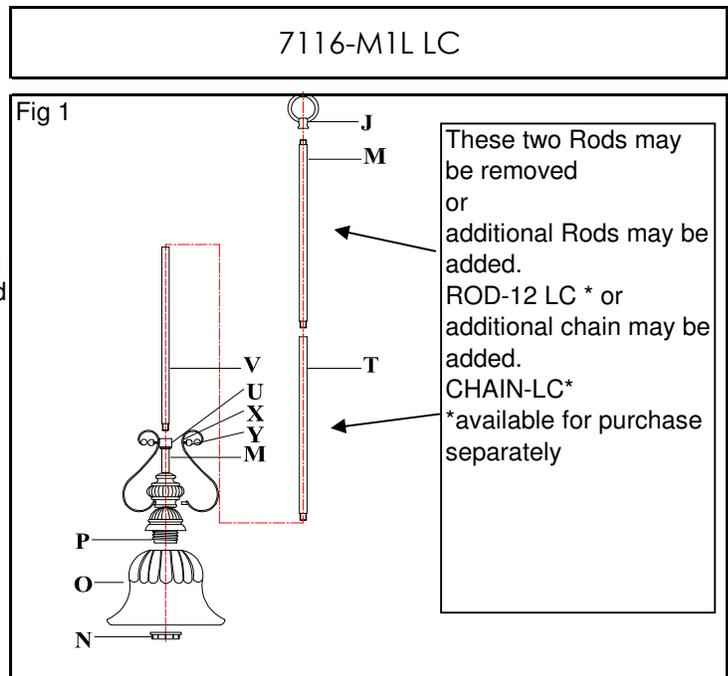

For Customer Service, contact the place of purchase to arrange for replacement parts.

# PARTS & ASSEMBLY SHEET

Fixture Name: Mayfair 7116-M1L LC

## ASSEMBLING THE FIXTURE (Fig 2)

4. Tuck the inside of each Scroll arm into the slot in fixture frame, align the top of Scroll arm (X) over the arm connector screws (Y)\* at top of socket assembly and secure in place with the Deco nuts (Y). alternate version may use Deco screws in place of nuts.

5. Feed the fixture wires through the Rods (V, T, M) and Top loop (J) and pull the wires until taut.

6. Then screw the Top Loop (J) to the threaded center column of Frame (M) until tight.

7. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (C2) then remove the excess Chain (C2) and discard it.

8. Use one chain connector(E2) to attach one end of the chain to the Top loop (D2) and close the chain connector.

9. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.

10. Slip Canopy loop collar (B2) over the chain, then do the same with the canopy.

11. When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop (A2) and close the chain connector.

12. Make sure the weight of the chandelier will be supported by the chain-not the electrical wire.

\* You may now install the fixture.

Note: Complete these remaining steps after the fixture is hung.

13. Place the Glass Shades(O) over the Threaded sockets(P), secure the Glass Shades (O) by threading by the Socket Rings (N) until tight.

14. Install the light bulbs in accordance with the fixture's specifications.

**(DO NOT EXCEED MAXIMUM WATTAGE RATING)**

Fig 2


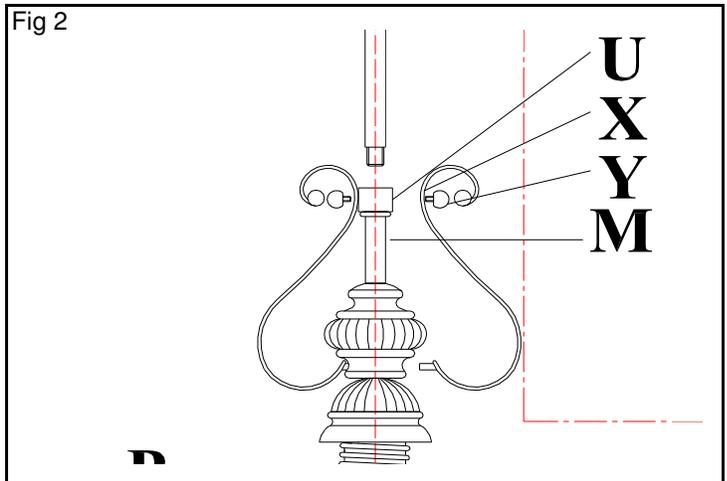


Fig 3

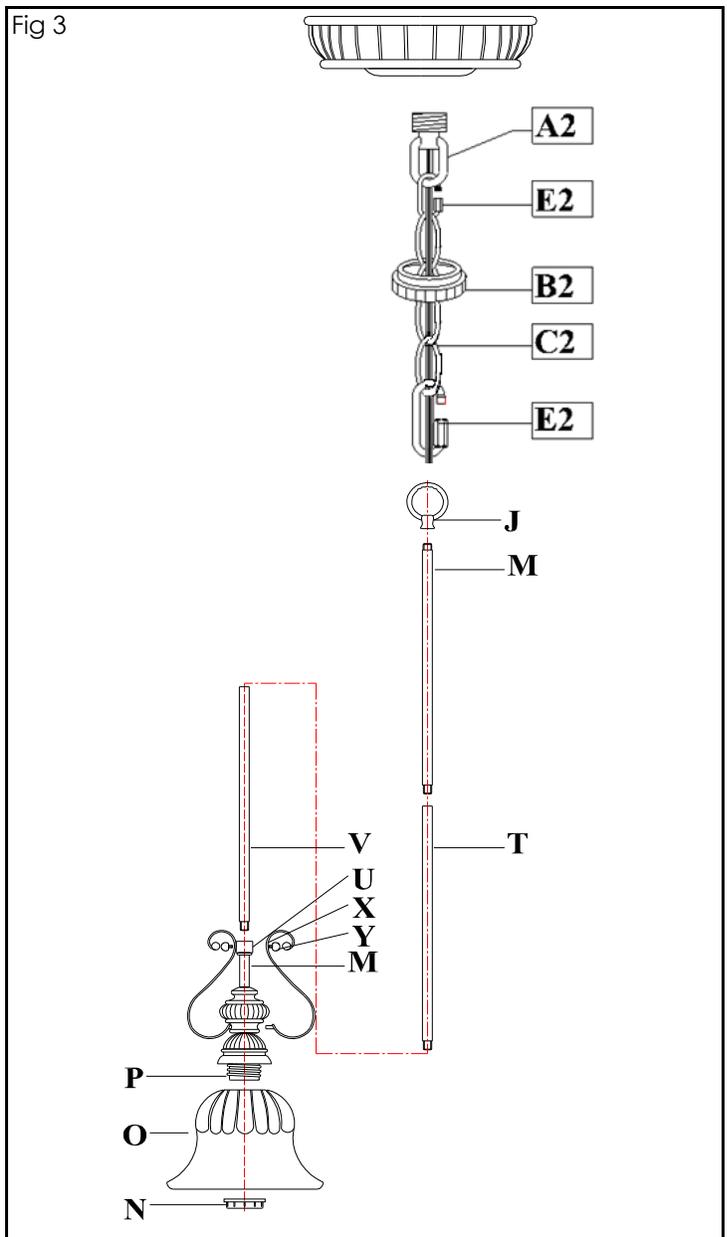

For Customer Service, contact the place of purchase to arrange for replacement parts.

**WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.**

**HANGING THE FIXTURE (Fig 1)**

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
3. Thread Nipple(C) into Canopy Loop (F) until snug.
4. Thread other end of the Nipple (C) with Canopy Loop attached into Mounting Strap (D).
5. Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto Nipple until tight.
6. Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten screw securely with screw driver.
7. Unscrew the Canopy loop collar(H) from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
8. Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
9. Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

**CONNECTING THE WIRES (Fig 2)**

10. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
11. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (D) or connect both wires together using the correct size of wire connectors.

**NOTE:** Twist the wires together in the same direction you twist the wire connector onto the wires.

12. Tuck these wire connections neatly into the Junction Box.
13. Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar (H) into the Canopy Loop (F)
14. Install the light bulbs and glass shade as per the fixture assembly sheet.

Fig. 1


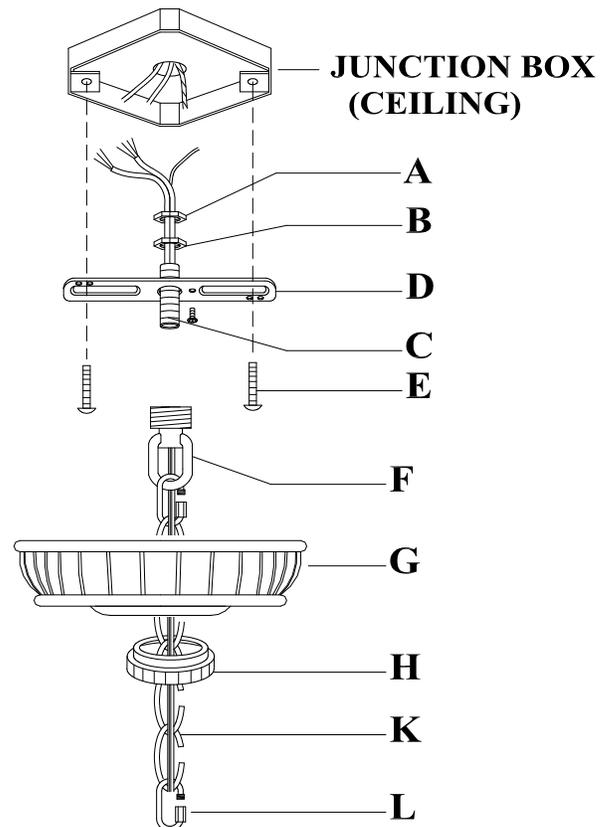


Fig. 2

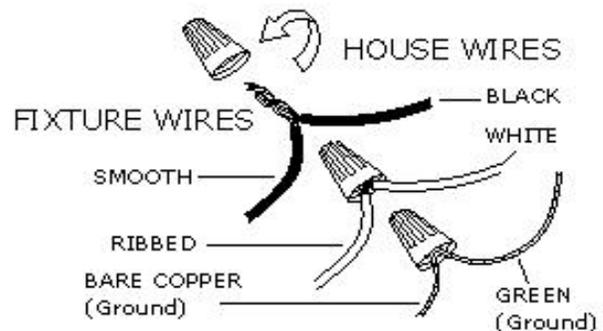

**YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.**